



VIEW ON WEBSITE



SCAN HERE ↑


# EXCEL 24



5019 GRAPEVINE



5142 GINGER BROWN

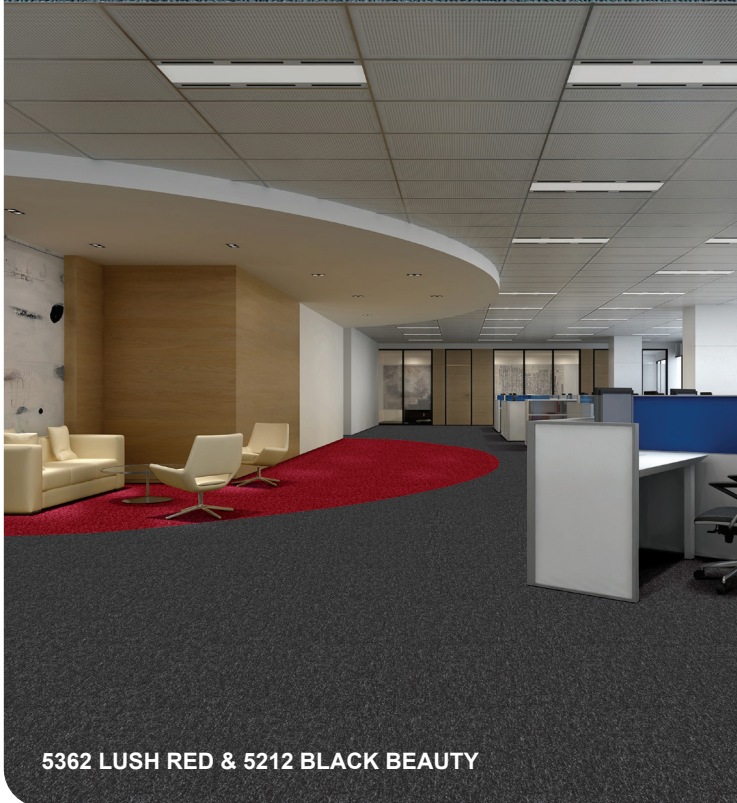

5362 LUSH RED & 5212 BLACK BEAUTY



5362 LUSH RED

LOOP PILE SOLID COLOR

Please note: There may be slight color difference between the picture and actual carpet. Slight color variation may occur from dye lot to dye lot.



5019 Grapevine




5142 Ginger Brown



5155 Dalton Blue



5156 Crystal Blue



5212 Black Beauty



5248 Rich Blue



5336 Autumn Grey



5362 Lush Red



5691 Walnut



5746 Bristol Blue



5800 Indian Spice



5212 BLACK BEAUTY & 5336 AUTUMN GREY

### EXCEL 24 Specifications

Construction	1/10" Gauge Tufted Loop Pile
Yarn Composition	100% Solution Dyed Polypropylene
Tufted Pile Weight	Ca. 815 g/m <sup>2</sup> (24 oz/yd <sup>2</sup> ) (+/- 10%)
Total Weight	Ca. 1600 g/m <sup>2</sup> (47 oz/yd <sup>2</sup> ) (+/- 10%)
Pile Height	Ca. 4.5 mm (+/- 0.5 mm)
Total Height	Ca. 6 mm (+/- 0.5 mm)
Stitch Rate	42 per 10 cm
Secondary Backing	ActionBac®
Density	165,900/m <sup>2</sup>
Standard Roll Size	3.66m (+/-2%) x 30m (+/-2%)

### Performance (as tested by ITTS Inc. USA)

Stain Resistance	10 (AATCC-175-2003)
Static Control	Pass - Max. 4 kV (AATCC 134-1996)
Tuft Bind	Pass - 4.2 lbs (ASTM-D-1335)
Flammability	
- Pill Test	Pass - 8 (ASTM-D-2859-96)
- Smoke Density	Pass - Max. 450 (ASTM-E-662-97)
Colourfastness	
- to light	Excellent - 5 (AATCC-16E)
- to wet & dry crocking	Excellent - 5 (AATCC-165)
- to ozone	Excellent - 5 (AATCC-129)

### Warranties

10 Year Carpet Wear Warranty  
 Lifetime Antishock Carpet Warranty  
 Ideal for Medium Contract Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. The seams may remain visible to the eye and this should be accepted as an inherent characteristic of carpet tiles. Due to dye lot variations, actual material may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.

Manufactured in U.A.E

# EXCEL24