



VIEW ON WEBSITE



SCAN HERE ↑

LANCELOT



5853 TIMBER

CUT PILE PATTERNED

Please note: There may be slight color difference between the picture and actual carpet. Slight color variation may occur from dye lot to dye lot.



5853 TIMBER

LANCELOT Specifications

Construction	1/10" Textured Cut & Loop Pattern
Yarn Composition	100% BCF Ultrel:indelible™ Nylon
Tufted Pile Weight	Ca. 1085 g/m ² (32 oz/yd ²) (+/- 10%)
Total Weight	Ca. 2010 g/m ² (60 oz/yd ²) (+/- 10%)
Pile Height	Ca. 3 mm (Cut) / 6 mm (Loop)
Stitch Rate	48 per 10 cm
Density	11.4 Kilotex/cm ² (5600 FHA)
Secondary Backing	FullCircle™ (10% Recycled Content)
Standard Roll Size	3.66m (+/-2%) x 40m (+/-2%)
Pattern Repeat Size	10cm x 14cm (4" x 5½")

Performance


Stain Resistance	8 (AATCC 175-1993)
Static Control	Pass - Max. 3 kV (AATC-134)
Soil Protection	PermaSeal™ Protected
Anti-Microbial Protection	Biofresh™ Present In Backing Laminate
Flammability	
- USA: Radiant Panel	Pass - Class I (ASTM E-648-08)
- Canada	CGSB 4GP-129, CAN 4-S102.2
Colourfastness	
- to light	L6 (AATCC-16E-1982)
- to wet cleaning	Grey Scale 5

Warranties

10 Year Limited Commercial Carpet Wear Warranty
 10 Year Limited Stain Proof No Exception Warranty
 Lifetime Limited No-Delamination No-Edge Ravel Warranty
 Limited AccuPattern™ Warranty
 Lifetime Limited Colorfast Carpet Warranty
 Lifetime Limited Antishock Carpet Warranty
 Ideal for Heavy Commercial Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. Where seaming is necessary, a seam sealant must be used for all such installations. Due to dye lot variations, actual color may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.

MANUFACTURED IN CANADA

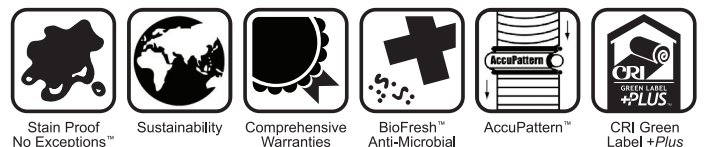

LANCELOT