


WONDERLINE

ENTRANCE MATTING SYSTEM

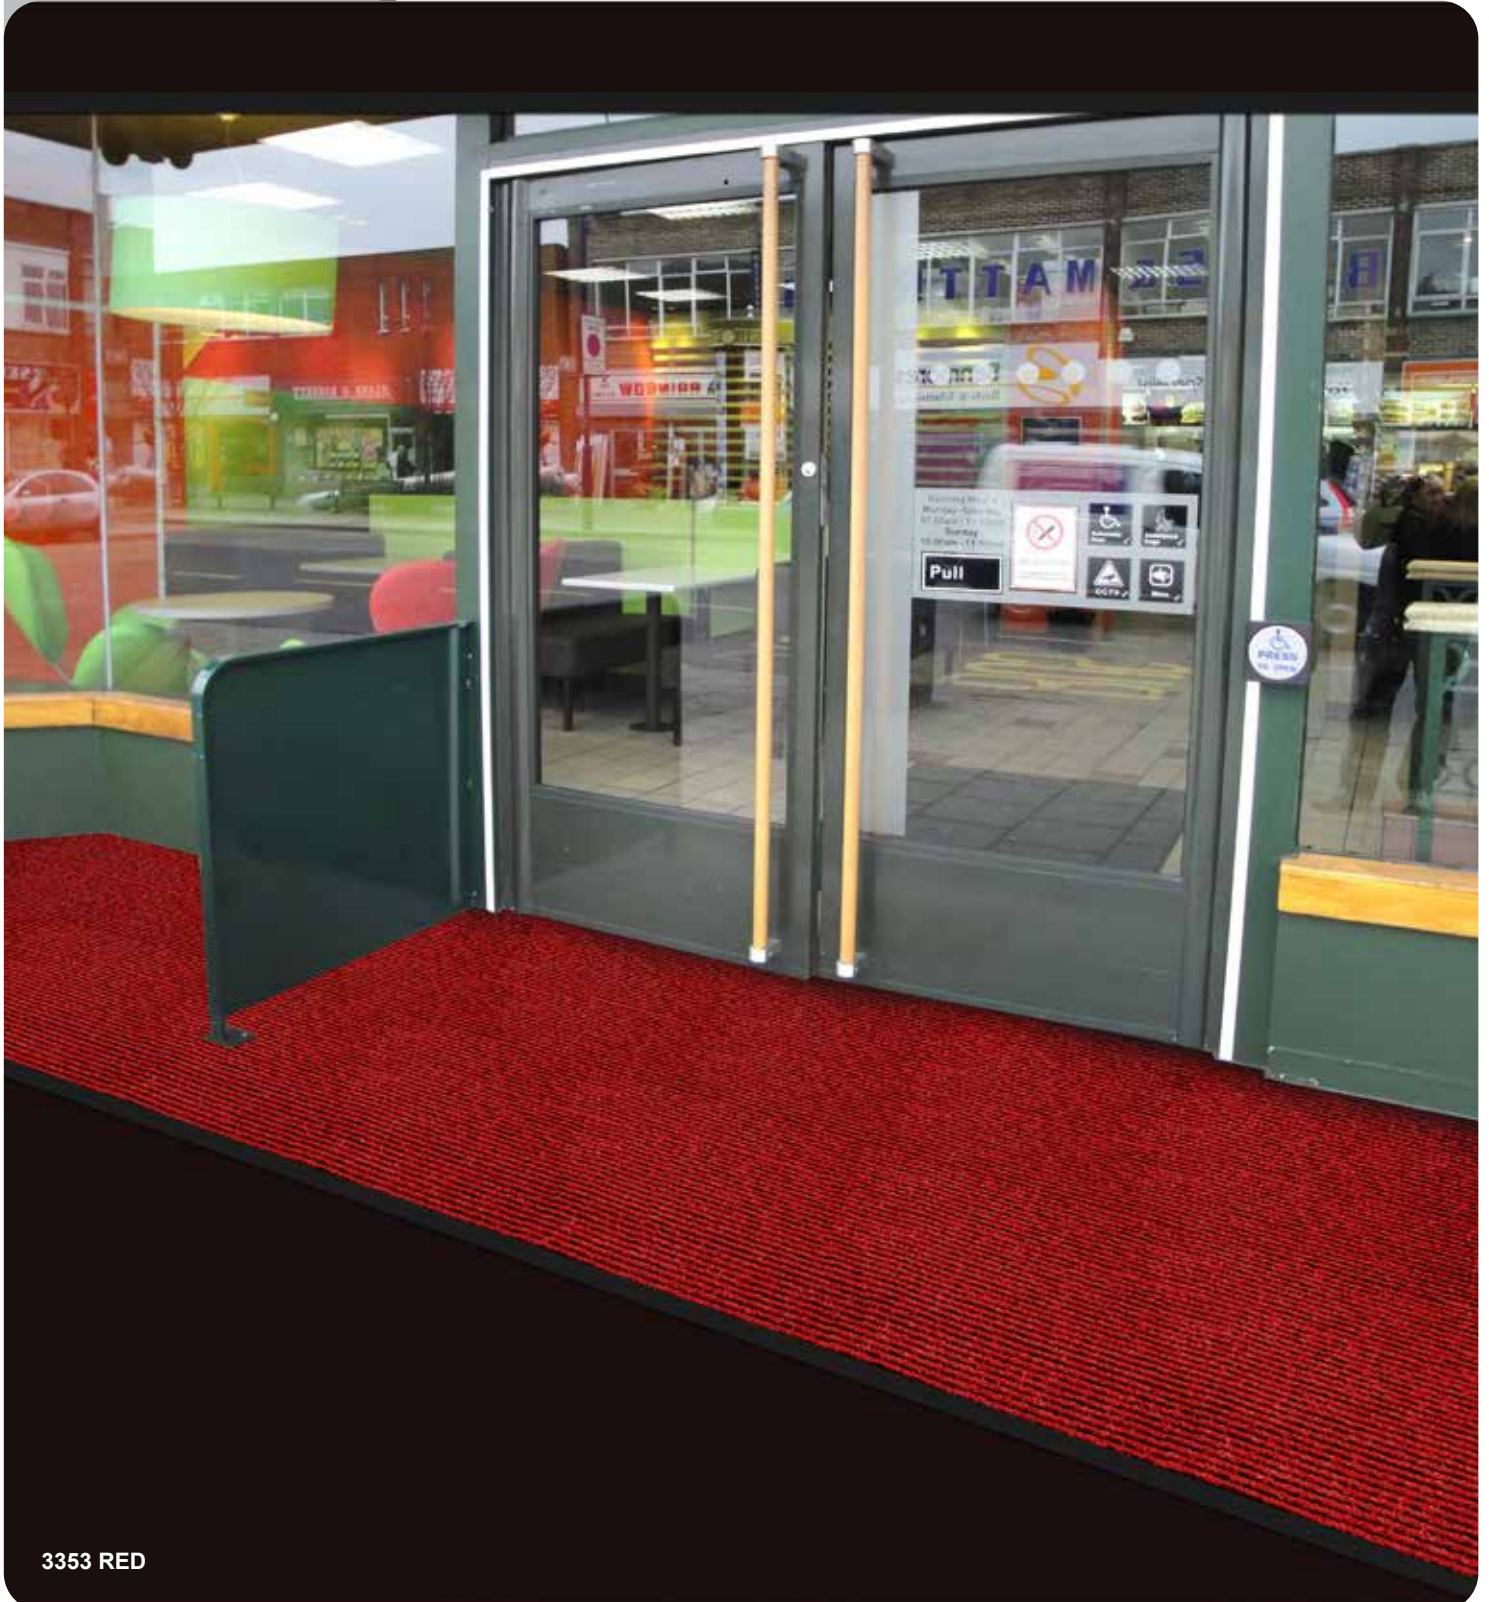

3353 RED

RUNNERS & ENTRANCE MATS

Please note: There may be slight color difference between the picture and actual carpet.

“The First Line of Defense Matting System outside and inside the entrance.”

Designed to remove, trap, hides dirt and absorb moisture before they get indoor, helping to keep floors clean throughout your building. Trapping dirt and moisture at the door is a healthy component of indoor air quality and green building maintenance.

Gelfoam Anti-slip Backing.

Easy to Maintain.



2098 ANTHRACITE



2098 ANTHRACITE



2343 JET BLACK



3353 RED



7006 OAK



7097 TOBACCO

WONDERLINE Specifications

Construction	Needle-Felt Patterned
Yarn Composition	100% Polypropylene
Pile Weight	Ca. 1500 g/m ² (+/- 10%)
Total Weight	Ca. 2330 g/m ² (+/- 10%)
Pile Height	Ca. 4.5 mm (+/- 10%)
Total Height	Ca. 10 mm (+/- 10%)
Backing	Gelfoam Anti-Slip Backing
Standard Roll Size	2m x 25m

Performance

(as tested by ITTS Inc. USA)

Static Control	Permanently Antistatic (ISO6356)
Acoustical Impact	24 db (EN ISO 140-8)
Grading	Heavy Commercial Spike Resistant
Flammability	Efl-Fully Adhesive Low (EN 13501-1, BS4790)
Classification	33-LC2 (EN13297)
Colourfastness to rubbing	4 (ISO105X12, except for 33533)

Suitability

For Hotel, Offices, Restaurant Entrance, Exhibitions, Fairs, Shows, Stage Floors, Walkway Areas, VIP Strips, Corridors, etc.

Warranty

5 Year Carpet Wear Warranty
Lifetime Anti-shock Carpet Warranty

Ideal for Normal Indoor Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. Where seaming is necessary, a seam sealant must be used for all such installations. Due to dye lot variations, actual color may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.



Manufactured in Belgium

WONDERLINE
ENTRANCE MATTING SYSTEM