

MUNDI

COLLECTION

SPECIFICATION SHEET

VOXFLOR®
passion and purpose




BASE - MUNDI COLLECTION


Technical Specifications

Construction: Multi-level loop with Tip-Shear	Standard Backing: EcoAce-Bac® Pro
Fiber: PUREWEAVE™ Nylon	Tile Size: 25 x 100 cm
Gauge: 1/10"	Pile Weight: 26 OZ/yd²
Stitches: 9 per inch	Total Thickness: 10.0 ± 0.5 mm
Area per carton: 5m²	Piece per carton: 20 pieces
Traffic Classification: Commercial - General Duty	Anti-microbial: Ultra Fresh (Available)
Average Pile Height: 5.0 ± 0.5 mm	

Installation Methods



Ashlar



Herringbone

**These given methods of installation are considered as classic solutions. However, certain cases and needs may be different, and designs will differ accordingly.

Certifications



ISO9001:2015
ISO14001:2015

DOWNLOAD



DOWNLOAD



ISO 14064
ISO 14067
ISO 14068-1

*Carbon Footprint
Carbon Neutrality



DOWNLOAD



DOWNLOAD



DOWNLOAD



DOWNLOAD



DOWNLOAD



DOWNLOAD



GLP No. 1100231

DOWNLOAD

Performance Specifications

	Test Code	Standard	Test Result
Flammability Tests			
Radiant Panel	ASTM E 648	≥45 watt/cm²	Class I
Methenamine Pill	ASTM D2859	7 out of 8	8
Smoke Density	ASTM E 662	≤ 450 DMC	≤ 450
Stability			
Delamination	ASTM D3936	≥ 3.0 lbc/in	No Separation
Dimensional Stability	AACHEN	≤ 0.2%	≤ 0.2%
Tuft Bind	ASTM D1335	≥ 8.0 lbs	≥ 8.0 lbs
Anti-Static			
Static Propensity	AATCC 134	≤ 3.5 kV	≤ 3.5 kV
Colour Fastness			
Light	AATCC 16 E	≥ 4	4-5
Rubbing/Crocking	AATCC 165	≥ 4	4-5
Wear Tests			
Castor Chair	BS EN 985	r ≥ 2.4	r = 2.8
Hexapod Drum	ASTM D5252	≥ 2.5	2.5
Acoustic Tests			
EcoAce-Bac®	EN ISO 354		αw = 0.30 (H)
EcoAce-Bac®	EN ISO 10140-1		ΔLw = 28 dB
EcoAce-Bac® Pro	EN ISO 354		αw = 0.30 (H)
EcoAce-Bac® Pro	EN ISO 10140-1		ΔLw = 29 dB

Warranty

Lifetime Commercial Limited Warranty [DOWNLOAD](#)

Additional Information

- VOXFLOr uses Ultra-Fresh Antimicrobial system, which is by controlling odour and staining causing bacteria, mold and mildew growth, Ultra-Fresh antimicrobial additives help to keep products fresher, cleaner and more durable.

Additional Files

Installation Guidelines [DOWNLOAD](#) Maintenance Guidelines [DOWNLOAD](#)






FOSSIL - MUNDI COLLECTION

Technical Specifications

Construction: Multi-level loop with Tip-Shear	Standard Backing: EcoAce-Bac® Pro
Fiber: PUREWEAVE™ Nylon	Tile Size: 25 x 100 cm
Gauge: 1/10"	Pile Weight: 30 OZ/yd²
Stitches: 9 per inch	Total Thickness: 10.0 ± 0.5 mm
Area per carton: 5m²	Piece per carton: 20 pieces
Traffic Classification: Commercial - General Duty	Anti-microbial: Ultra Fresh (Available)
Average Pile Height: 5.0 ± 0.5 mm	

Installation Methods

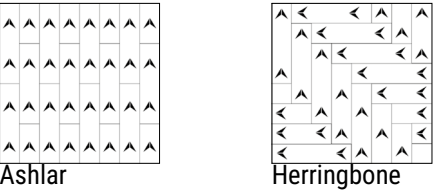

**These given methods of installation are considered as classic solutions. However, certain cases and needs may be different, and designs will differ accordingly.

Certifications



ISO 9001:2015
ISO 14001:2015

DOWNLOAD



DOWNLOAD



ISO 14064
ISO 14067
ISO 14068-1

*Carbon Footprint
Carbon Neutrality



DOWNLOAD



DOWNLOAD



DOWNLOAD



DOWNLOAD



DOWNLOAD



DOWNLOAD



GLP No. : 100231

DOWNLOAD

Performance Specifications

	Test Code	Standard	Test Result
Flammability Tests			
Radiant Panel	ASTM E 648	≥.45 watt/cm²	Class I
Methenamine Pill	ASTM D2859	7 out of 8	8
Smoke Density	ASTM E 662	≤ 450 DMC	≤ 450
Stability			
Delamination	ASTM D3936	≥ 3.0 lbc/in	No Separation
Dimensional Stability	AACHEN	≤ 0.2%	≤ 0.2%
Tuft Bind	ASTM D1335	≥ 8.0 lbs	≥ 8.0 lbs
Anti-Static			
Static Propensity	AATCC 134	≤ 3.5 kV	≤ 3.5 kV
Colour Fastness			
Light	AATCC 16 E	≥ 4	4-5
Rubbing/Crocking	AATCC 165	≥ 4	4-5
Wear Tests			
Castor Chair	BS EN 985	r ≥ 2.4	r = 2.8
Hexapod Drum	ASTM D5252	≥ 2.5	2.5
Acoustic Tests			
EcoAce-Bac®	EN ISO 354		αw = 0.30 (H)
EcoAce-Bac®	EN ISO 10140-1		ΔLw = 28 dB
EcoAce-Bac® Pro	EN ISO 354		αw = 0.30 (H)
EcoAce-Bac® Pro	EN ISO 10140-1		ΔLw = 29 dB

Warranty

Lifetime Commercial Limited Warranty [DOWNLOAD](#)

Additional Information

- VOXFLOr uses Ultra-Fresh Antimicrobial system, which is by controlling odour and staining causing bacteria, mold and mildew growth, Ultra-Fresh antimicrobial additives help to keep products fresher, cleaner and more durable.

Additional Files

Installation Guidelines [DOWNLOAD](#) Maintenance Guidelines [DOWNLOAD](#)






MISTY - MUNDI COLLECTION


Technical Specifications

Construction: Multi-level loop with Tip-Shear	Standard Backing: EcoAce-Bac® Pro
Fiber: PUREWEAVE™ Nylon	Tile Size: 25 x 100 cm
Gauge: 1/10"	Pile Weight: 30 OZ/yd²
Stitches: 9 per inch	Total Thickness: 10.0 ± 0.5 mm
Area per carton: 5m²	Piece per carton: 20 pieces
Traffic Classification: Commercial - General Duty	Anti-microbial: Ultra Fresh (Available)
Average Pile Height: 5.0 ± 0.5 mm	

Installation Methods



Ashlar



Herringbone

**These given methods of installation are considered as classic solutions. However, certain cases and needs may be different, and designs will differ accordingly.

Certifications



ISO9001:2015
ISO14001:2015

DOWNLOAD



DOWNLOAD



ISO 14064
ISO 14067
ISO 14068-1

*Carbon Footprint
Carbon Neutrality



DOWNLOAD



DOWNLOAD



DOWNLOAD

Declare.



DOWNLOAD



DOWNLOAD



GLP No. 1100231

DOWNLOAD

Performance Specifications

	Test Code	Standard	Test Result
Flammability Tests			
Radiant Panel	ASTM E 648	≥.45 watt/cm²	Class I
Methenamine Pill	ASTM D2859	7 out of 8	8
Smoke Density	ASTM E 662	≤ 450 DMC	≤ 450
Stability			
Delamination	ASTM D3936	≥ 3.0 lbc/in	No Separation
Dimensional Stability	AACHEN	≤ 0.2%	≤ 0.2%
Tuft Bind	ASTM D1335	≥ 8.0 lbs	≥ 8.0 lbs
Anti-Static			
Static Propensity	AATCC 134	≤ 3.5 kV	≤ 3.5 kV
Colour Fastness			
Light	AATCC 16 E	≥ 4	4-5
Rubbing/Crocking	AATCC 165	≥ 4	4-5
Wear Tests			
Castor Chair	BS EN 985	r ≥ 2.4	r = 2.8
Hexapod Drum	ASTM D5252	≥ 2.5	2.5
Acoustic Tests			
EcoAce-Bac®	EN ISO 354		αw = 0.30 (H)
EcoAce-Bac®	EN ISO 10140-1		ΔLw = 28 dB
EcoAce-Bac® Pro	EN ISO 354		αw = 0.30 (H)
EcoAce-Bac® Pro	EN ISO 10140-1		ΔLw = 29 dB

Warranty

Lifetime Commercial Limited Warranty [DOWNLOAD](#)


Additional Information

- VOXFLOr uses Ultra-Fresh Antimicrobial system, which is by controlling odour and staining causing bacteria, mold and mildew growth, Ultra-Fresh antimicrobial additives help to keep products fresher, cleaner and more durable.

Additional Files

Installation Guidelines [DOWNLOAD](#)

Maintenance Guidelines [DOWNLOAD](#)

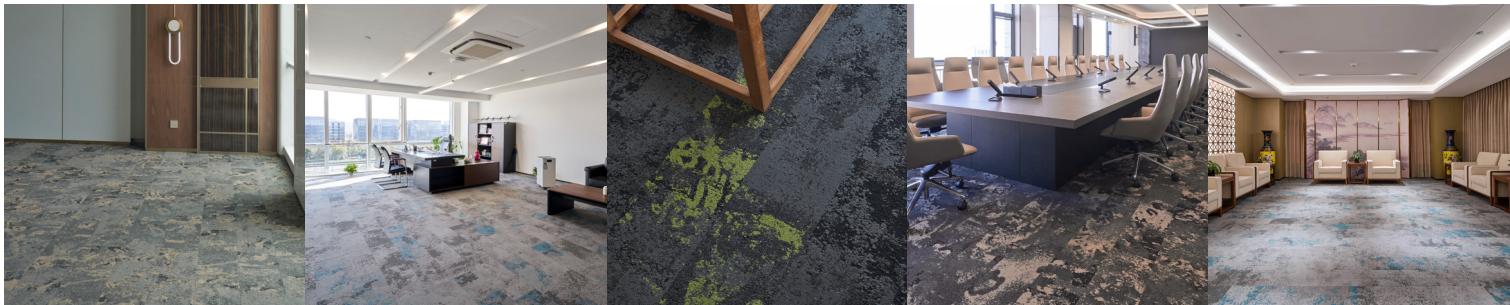




MOSS

Technical Specifications

Construction: Multi-level Loop	Standard Backing: EcoAce-Bac® Pro
Fiber: PUREWEAVE™ Nylon	Tile Size: 25 x 100 cm
Gauge: 1/10"	Pile Weight: 32 OZ/yd²
Stitches: 9 per inch	Total Thickness: 10.0 ± 0.5 mm
Area per carton: 5m²	Piece per carton: 20 pieces
Traffic Classification: Commercial - Heavy Duty	Anti-microbial: Ultra Fresh (Available)
Average Pile Height: 5.0 ± 0.5 mm	

Installation Methods

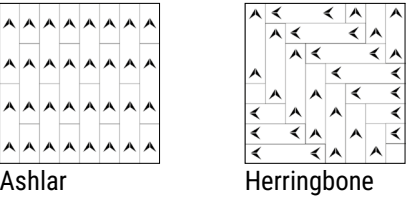

**These given methods of installation are considered as classic solutions. However, certain cases and needs may be different, and designs will differ accordingly.

Certifications

 ISO 9001:2015 ISO 14001:2015 DOWNLOAD	 DOWNLOAD	 ISO 14064 ISO 14067 ISO 14068-1 *Carbon Footprint Carbon Neutrality	 DOWNLOAD	 DOWNLOAD
 DOWNLOAD	 BRONZE DOWNLOAD	 DOWNLOAD	 ENVIRONMENTAL PRODUCT DECLARATION e1100001 DOWNLOAD	 GLP No. 1100231 DOWNLOAD

Performance Specifications

	Test Code	Standard	Test Result
Flammability Tests			
Radiant Panel	ASTM E 648	≥ 45 watt/cm²	Class I
Methenamine Pill	ASTM D2859	7 out of 8	8
Smoke Density	ASTM E 662	≤ 450 DMC	≤ 450
Stability			
Delamination	ASTM D3936	≥ 3.0 lbc/in	No Separation
Dimensional Stability	AACHEN	≤ 0.2%	≤ 0.2%
Tuft Bind	ASTM D1335	≥ 8.0 lbs	≥ 8.0 lbs
Anti-Static			
Static Propensity	AATCC 134	≤ 3.5 kV	≤ 3.5 kV
Colour Fastness			
Light	AATCC 16 E	≥ 4	4-5
Rubbing/Crocking	AATCC 165	≥ 4	4-5
Wear Tests			
Castor Chair	BS EN 985	r ≥ 2.4	r = 2.8
Hexapod Drum	ASTM D5252	≥ 2.5	3
Acoustic Tests			
EcoAce-Bac®	EN ISO 354		αw = 0.30 (H)
EcoAce-Bac®	EN ISO 10140-1		ΔLw = 28 dB
EcoAce-Bac® Pro	EN ISO 354		αw = 0.30 (H)
EcoAce-Bac® Pro	EN ISO 10140-1		ΔLw = 29 dB

Warranty


Lifetime Commercial Limited **Warranty** [DOWNLOAD](#)

Additional Information

- VOXFLOr uses Ultra-Fresh Antimicrobial system, which is by controlling odour and staining causing bacteria, mold and mildew growth, Ultra-Fresh antimicrobial additives help to keep products fresher, cleaner and more durable.

Additional Files

Installation Guidelines [DOWNLOAD](#) **Maintenance Guidelines** [DOWNLOAD](#)

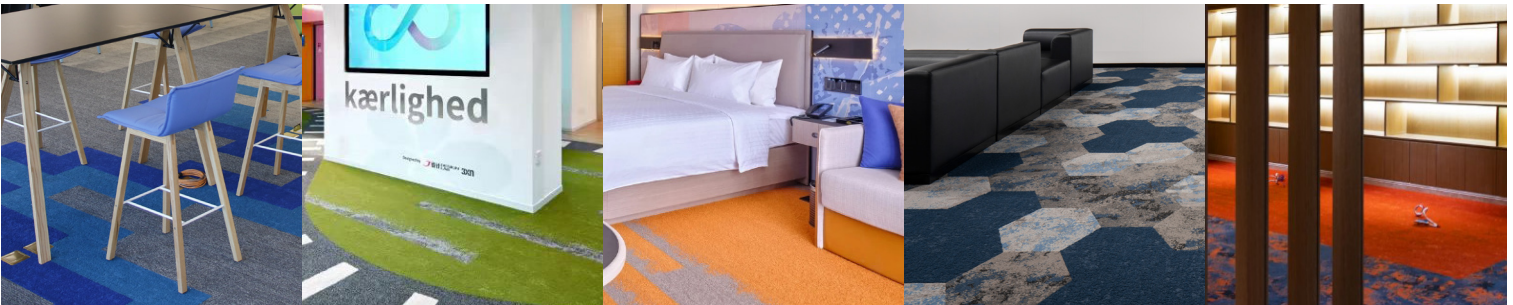



VOXFLOR®

www.voxflor.com

Shanghai **Headquarters**

T +86 21 62989325

Milano Creative Studio

T +39 3885863150

China **Branch Offices**

Beijing/ Guangzhou/ Shenzhen/ Xiamen

