



TECHNICAL INFORMATION

Installation Guide

- The subfloor surfaces must be level, flat, clean, dry, smooth, and free of movement. All surface imperfections should be filled and sanded with a portland cement-based latex patching compound.
- Room temperature must be maintained at 18 °C or higher before and during installation.
- The flooring must be allowed to acclimate in the room to be installed for a minimum of 24 hours and be stacked flat on the floor to avoid bending the floor.
- Prior to installation, please ensure that both color and lot # are the same.

Maintenance

- Regularly sweep floor to remove sand and grit that can scratch floor.
- For best results, use only water with a mop. Avoid flooding the floor with too much water.
- For heavily soiled areas, use a neutral pH balanced floor cleaner.
- Use caution when lifting boxes.
- Promptly remove any standing water to avoid slippage.
- Keep Infiniti on the flat surface to keep it from warping.

Technical Data

DESCRIPTION	Standard	Craft			
Total thickness	EN 428	2.0mm			
Wear layer thickness	EN 429	0.2mm			
Total weight	EN 430	3450g/m²			
Size	EN 427	600×600mm	457×457mm		
		184x1220mm	457x914mm		
CLASSIFICATION					
Classification	EN 685	23-31			
Fire rating	EN 13501-1	Bfl-s1			
Static electrical propensity	EN 1815	<2kV			
Slip resistance wet	DIN 51130	R10			
PERFORMANCES					
Wear resistance	EN 660-2	≤2.0mm³			
Wear group	NF 189	Group T			
Impact sound reduction	EN ISO 717-2	5dB			
Residual indentation	EN 433	≤0.10mm			
Castor chair	EN 425	OK			
Thermal resistance	EN 12524	0.25W/(m.K)			
Colour fastness	EN 20 105-B02	≥6			
Surface treatment	---	PUR			
Chemical resistance	EN 423	Good			
CE MARKING					
CE MARKING	EN 14041				

Craft

Craft
LUXURY VINYL TILES




Craft



Triangle 600mm




Square 457×457 mm



Plank 184×1220 mm



Rectangle 457×914 mm

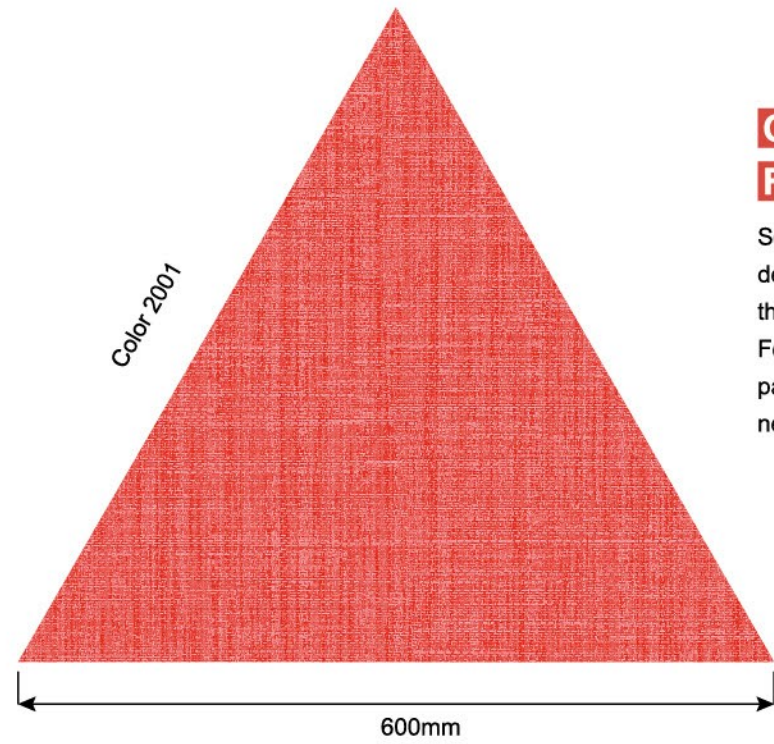

CUSTOMISATION FOR YOUR PROJECT

Sometimes, an interior project demands unique design to deliver that final touch making all the difference. We're more than happy to help you create that project specific flooring. Feel free to contact us with your idea and let us become a part of your creative process. The design possibilities are nearly endless.



Triangle



Rectangle




Square



Plank




2003

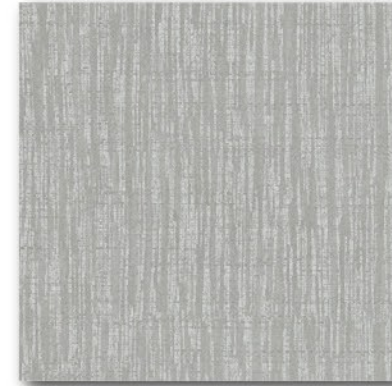


2007



2005

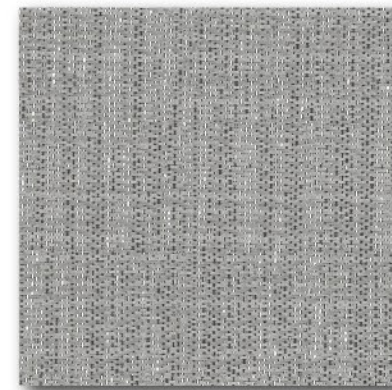

2009

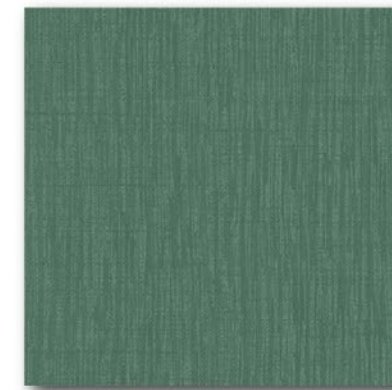

2008



2004




2010



2006



2002

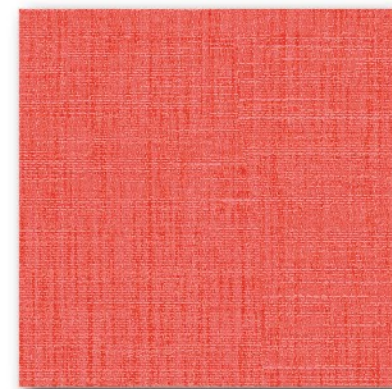

2001


Craft



Triangle 600mm




Square 457×457 mm



Plank 184×1220 mm



Rectangle 457×914 mm

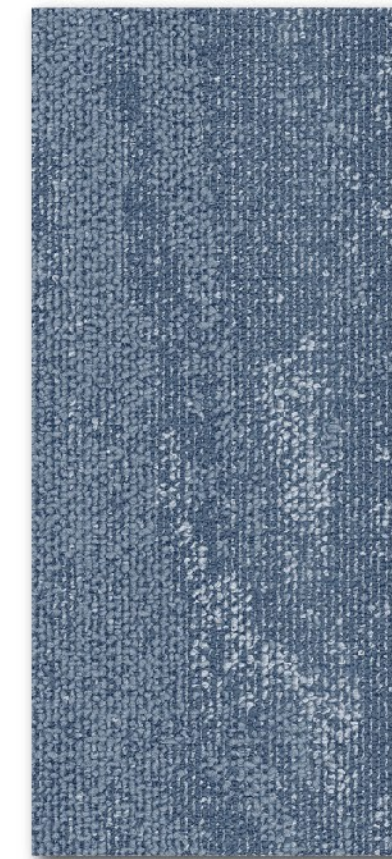


2504




2501



2502

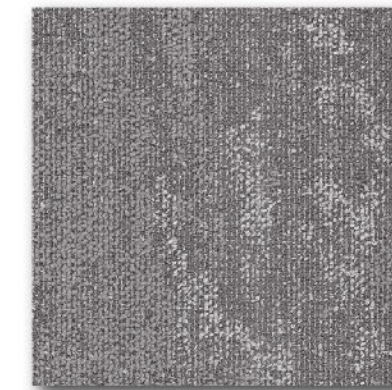

2505

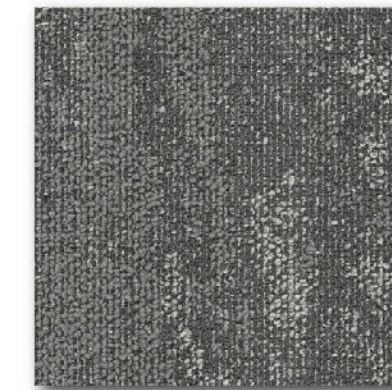

2506



2601



2603



2607



2602



2608