



TECHNICAL INFORMATION

Installation Guide

- The subfloor surfaces must be level, flat, clean, dry, smooth, and free of movement. All surface imperfections should be filled and sanded with a portland cement-based latex patching compound.
- Room temperature must be maintained at 18 °C or higher before and during installation.
- The flooring must be allowed to acclimate in the room to be installed for a minimum of 24 hours and be stacked flat on the floor to avoid bending the floor.
- Prior to installation, please ensure that both color and lot # are the same.

Maintenance

- Regularly sweep floor to remove sand and grit that can scratch floor.
- For best results, use only water with a mop. Avoid flooding the floor with too much water.
- For heavily soiled areas, use a neutral ph balanced floor cleaner.
- Use caution when lifting boxes.
- Promptly remove any standing water to avoid slippage.
- Keep Shape on the flat surface to keep it from warping.

Technical Data

DESCRIPTION	Standard	Shape 4.0	Shape 4.5	Shape 5.0
Total thickness	EN 428	4.0mm	4.5mm	5.0mm
Wear layer thickness	EN 429	0.3mm	0.3mm	0.55mm
Total weight	EN 430	7740g/m2	8710g/m2	9670g/m2
Size	EN 427	101.6 x 609.6mm / 125 x 750mm		
CLASSIFICATION				
Classification	EN 685	33-42	33-42	33-42
Fire rating	EN 13501-1	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	<2kV	<2kV	<2kV
Slip resistance wet	DIN 51130	R10	R10	R10
PERFORMANCES				
Wear resistance	EN 660-2	≤2.0mm³	≤2.0mm³	≤2.0mm³
Wear group	NF 189	Group T	Group T	Group T
Impact sound reduction	EN ISO 717-2	5dB	5dB	7dB
Residual indentation	EN 433	≤0.10mm	≤0.10mm	≤0.10mm
Castor chair	EN 425	OK	OK	OK
Thermal resistance	EN 12524	0.25W/(m.K)	0.25W/(m.K)	0.25W/(m.K)
Colour fastness	EN 20 105-B02	≥6	≥6	≥6
Surface treatment	---	PUR+	PUR+	PUR+
Chemical resistance	EN 423	Good	Good	Good
CE MARKING				
CE MARKING				
	EN 14041			
				

9


Shape





SHAPE

- Unilin click system - free adhesive, quick & easy installation
- Suits most subfloor types: ceramics, concrete, resin and irregular surface
- Phthalate free, 100% recyclable, TVOC <10µg/m3
- Ideal for moderate traffic areas : home, office, hotel, retail, public areas

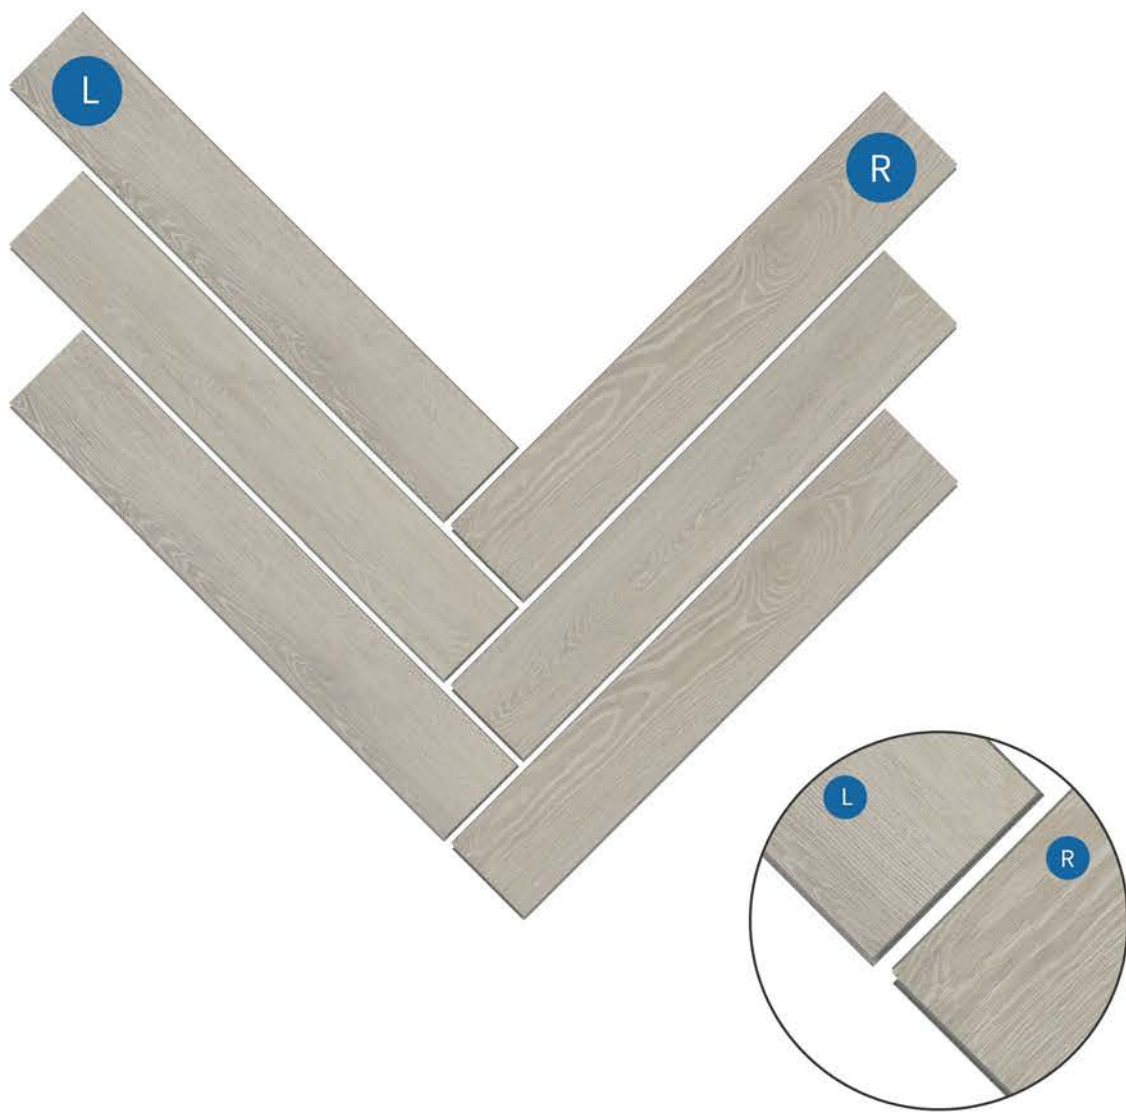

Product Specification

Pieces Per Box / Total Area:			
24 Pieces = 2.25 m²		32 Pieces = 1.982 m²	
Size: 125 x 750 mm		101.6 x 609.6 mm	
Thickness (mm)	4.0mm	4.5mm	5.0mm
Wear Layer (mm)	0.3	0.3	0.55



5001



5002



5003



5004



5005



5006



5007



5008