UNI

UNI is a 2 mm smooth rubber flooring with colored granules available in 20 colors. Its neutral and lively accent colors create an elegant appearance, while bold tones and interspersed granules highlight specific areas and aid visitor orientation.
UNI enhances safety, improves indoor environments, and simplifies maintenance. It is ideal for healthcare, education, retail, cultural spaces, and public buildings, where both style and functionality are essential.

PRODUCT BENEFITS

Durable Surface
Withstand heavy rolling loads and high wheeled traffic.

Ergonomic Design
Offer underfoot comfort, reducing pain in feet and legs.

Quiet Acoustic Performance
Reduce noise pollution effectively up to 20 dB

Superior Slip Resistance
Help to create safer spaces. Suitable for high-traffic areas.

Easy Maintenance
Clean with just water no finishes, coatings, or harsh chemicals needed.

Supports Infection Control
Easily disinfected due to a dense, non-porous surface.

TECHNICAL DATA

DESCRIPTION			UNI
Total thickness	EN ISO 24346	mm	2.0
Weight	EN ISO 23997	g/m^2	3200
Width of sheet	EN ISO 24341	cm	122
Length of sheet	EN ISO 24341	lm	15
CLASSIFICATION			
Classification	EN ISO 10874	class	34 / 42
Fire rating	EN 13 501-1	class	Bfl-s1
Electrical resistance	EN 1815	kV	< 2
	EN 1081	Ω	≥ 10^{10}
Slip resistance	EN 16165	class	R9
PERFORMANCE			
Thermal conductivity	EN ISO 10456	W/(m.K)	Fulfilled
Dynamic coefficient of friction	EN 13893	DS	Fulfilled
Dimensional stability	EN ISO 23999	%	± 0.3
Cigarette-burn resistance	EN 1399	≥ level 4	Fulfilled
Flexibility	EN ISO 24344	--	Fulfilled
Hardness	ISO 48-4	≥ 75 Shore A	92
Residual indentation	EN ISO 24343	mm	0.03
Abrasion resistance	ISO 4649	mm^3	150
Colour fastness	EN ISO 105 - B02	degree	≥ 6
Toxicity of fire gases	DIN 53436	--	Non-toxic
Sound absorption	ISO 10140-3	dB	6
Chemical resistance	EN ISO 26987	class	Good
Castor chair test	EN ISO 4918	--	Suitable
Underfloor heating	EN 1264-2	°C	Suitable max.35
CE MARKING CE	**EN 14041**	DS	B_{fl}-s1

Rubber Flooring

UNI

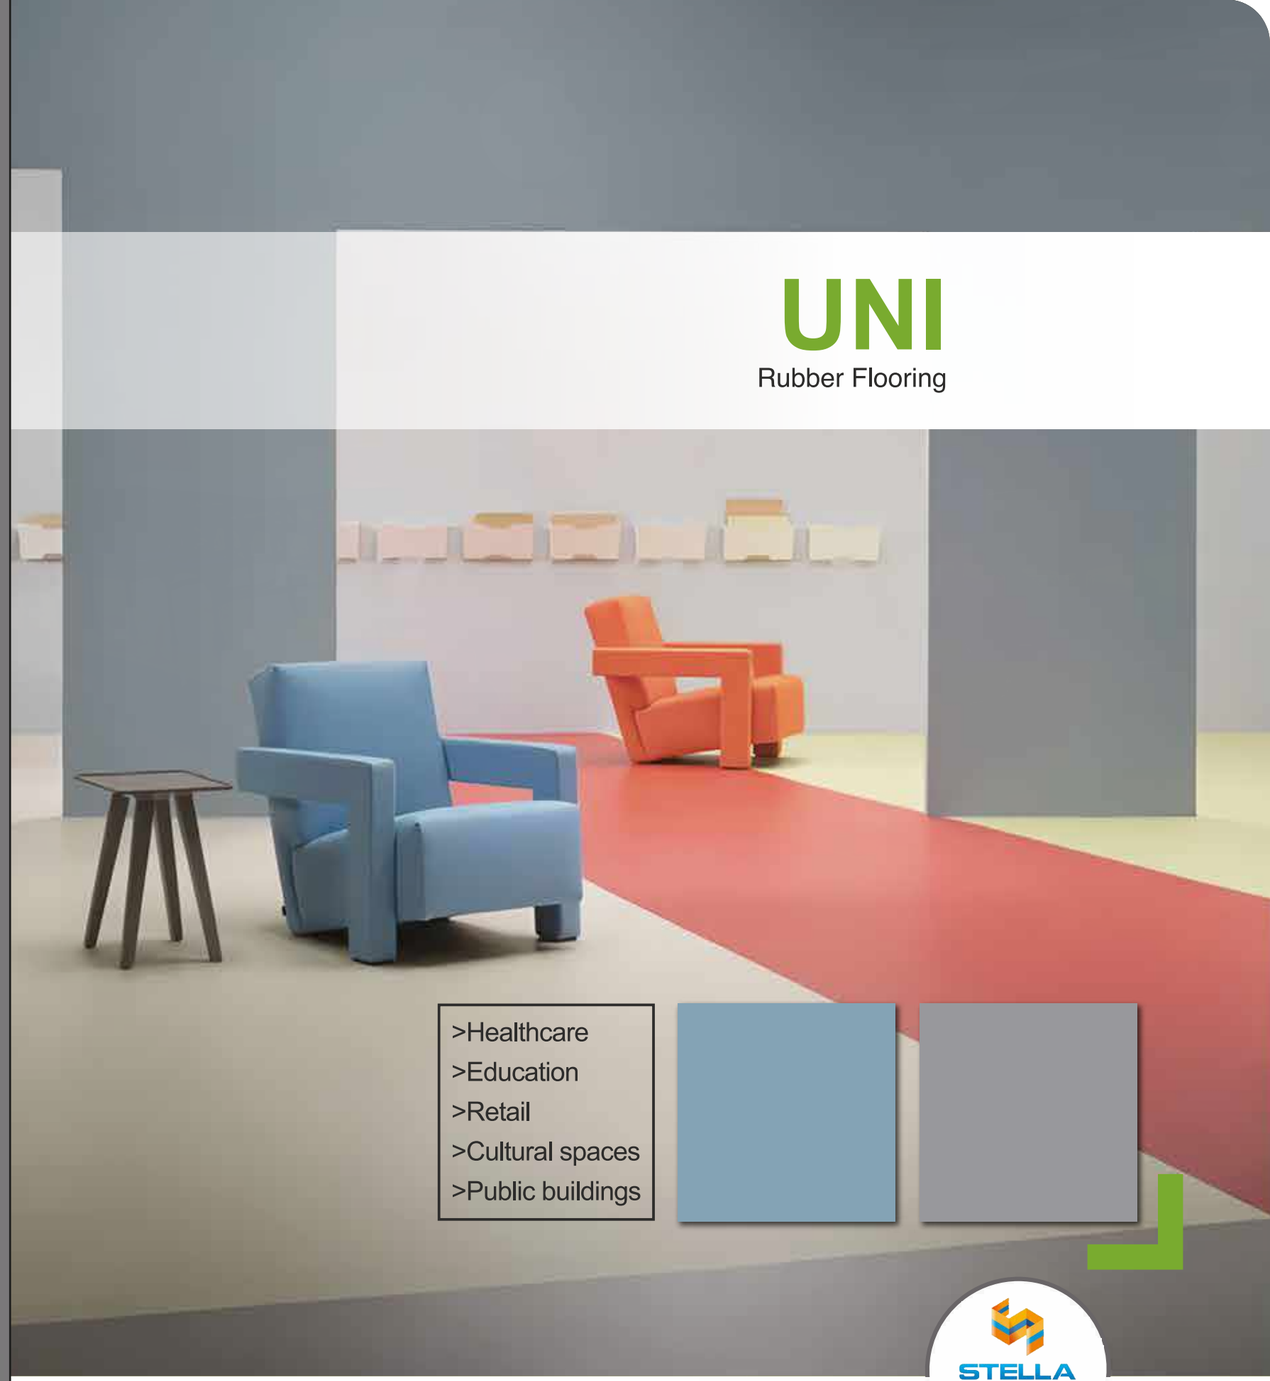

UNI

Rubber Flooring

>Healthcare
>Education
>Retail
>Cultural spaces
>Public buildings

STELLA GLOBAL

UNI

20 | 1.22m x 15m | 2.0 / 2.5 / 3.0mm







7504



7508



7506



7516



7517



7518



7510



7528



7535



7530



7520



7522



7526



7524



7512



7500



7514



7532



7502



7533