# ABOVE WOODS

## LVT COLLECTION

# SPECIFICATION SHEET

VOXFLOR®
passion and purpose



# ABOVE WOODS A

## Technical Specifications

**Total Thickness:** 5mm

**Wear Layer Thickness:** 0.5mm

**Wear Layer Treatment:** UV

**Tile Size:** 25 x 100 cm


**Usage Classification:** 42 Light Industrial General, 33 Commercial Heavy

**Backing:** Loose lay

**Piece per carton:** 8 pieces

**Area per carton:** 2m²

## Installation Methods


Ashlar


Herringbone

**These given methods of installation are considered as classic solutions.
However, certain cases and needs may be different, and designs will differ accordingly.

## Additional Information

- All Product Specifications are averages derived from product sample testing and are subject to normal manufacturing tolerances and testing tolerances. Product Specifications may be changed without notice as long as product performance is not materially affected.

## Certifications

floor score

CERTIFIED BY SCS Global Services

DOWNLOAD

## Performance Specifications

| | Test Code | Standard | Test Result |
|---|---|---|---|
| **Flammability Test** | EN13501 | Bfl-S1 | Pass |
| **Slip resistance Test** | EN13893:2002 | DS | Pass |
| **Formaldehyde Test** | EN717-1 | E1 | Pass |
| **Color Fastness to artificial light** | ISO 105-B02:2014 Method 3 | ≥Grade 6 | Pass |
| **Residual indentation** | ISO 24343-1:2007 | Average value: ≤0.1mm | Pass |
| **Dimensional stability after exposure to heat** | ISO 23999:2008 | ≤0.25% (tiles intended for dry-joint laying)<br>≤0.4% (sheets and tiles intended for heat welding) | Pass |
| **Curling after exposure to heat** | ISO 23999:2008 | ≤2mm (tiles intended for dry-joint laying)<br>≤8mm (sheets and tiles intended for heat welding) | Pass |
| **Effect of castor chair** | ISO 4918:2016 | After 25,000 cycles, no delamination shall occur. No disturbance to the surface other than a slight change in apperance. | Pass |
| **Slip Resistance (Oil-wet Ramp Test)** | DIN 51130:2014-02 | Critical angle of inclination 13.8°.<br>Rating: R10 | Pass |
| **Antimicrobial activity test** | ASTM D 21-15 | Standard practice for determining<br>resistance synthetic polymeric materials to Fungi | Pass |
| **Sound Absorption Coefficient** | ISO 354 | aw=0.05 | Pass |
| **Impact Sound Insulation** | ISO 10140 | ΔLlin=2 dB | Pass |
| **Composition** | | PVC, DOTP, Calcium Carbonate, Fiber Glass | |

## Warranty

**Lifetime** Commercial Limited **Warranty** DOWNLOAD

## Additional Files

**Installation & Maintenance Guidelines** DOWNLOAD





# ABOVE WOODS C/D/F/H

## Technical Specifications

**Total Thickness:** 5mm

**Wear Layer Thickness:** 0.5mm

**Wear Layer Treatment:** UV

**Tile Size:** 22.86 x 121.92cm


**Usage Classification:** 42 Light Industrial General, 33 Commercial Heavy

**Backing:** Loose lay

**Piece per carton:** 8 pieces

**Area per carton:** 2.232m$^2$

## Installation Methods



Ashlar



Herringbone

**These given methods of installation are considered as classic solutions.
However, certain cases and needs may be different, and designs will differ accordingly.

## Additional Information

- All Product Specifications are averages derived from product sample testing and are subject to normal manufacturing tolerances and testing tolerances. Product Specifications may be changed without notice as long as product performance is not materially affected.

## Certifications

floor score

CERTIFIED BY SCS Global Services

DOWNLOAD

## Performance Specifications


| | Test Code | Standard | Test Result |
|---|---|---|---|
| **Flammability Test** | EN13501 | Bfl-S1 | Pass |
| **Slip resistance Test** | EN13893:2002 | DS | Pass |
| **Formaldehyde Test** | EN717-1 | E1 | Pass |
| **Color Fastness to artificial light** | ISO 105-B02:2014 Method 3 | ≥Grade 6 | Pass |
| **Residual indentation** | ISO 24343-1:2007 | Average value: ≤0.1mm | Pass |
| **Dimensional stability after exposure to heat** | ISO 23999:2008 | ≤0.25% (tiles intended for dry-joint laying)<br>≤0.4% (sheets and tiles intended for heat welding) | Pass |
| **Curling after exposure to heat** | ISO 23999:2008 | ≤2mm (tiles intended for dry-joint laying)<br>≤8mm (sheets and tiles intended for heat welding) | Pass |
| **Effect of castor chair** | ISO 4918:2016 | After 25,000 cycles, no delamination shall occur. No disturbance to the surface other than a slight change in apperance. | Pass |
| **Slip Resistance (Oil-wet Ramp Test)** | DIN 51130:2014-02 | Critical angle of inclination 13.8°.<br>Rating: R10 | Pass |
| **Antimicrobial activity test** | ASTM D 21-15 | Standard practice for determining<br>resistance synthetic polymeric materials to Fungi | Pass |
| **Sound Absorption Coefficient** | ISO 354 | aw=0.05 | Pass |
| **Impact Sound Insulation** | ISO 10140 | ΔLlin=2 dB | Pass |
| **Composition** | | PVC, DOTP, Calcium Carbonate, Fiber Glass | |

## Warranty

**Lifetime** Commercial Limited **Warranty** DOWNLOAD

## Additional Files

**Installation & Maintenance Guidelines** DOWNLOAD

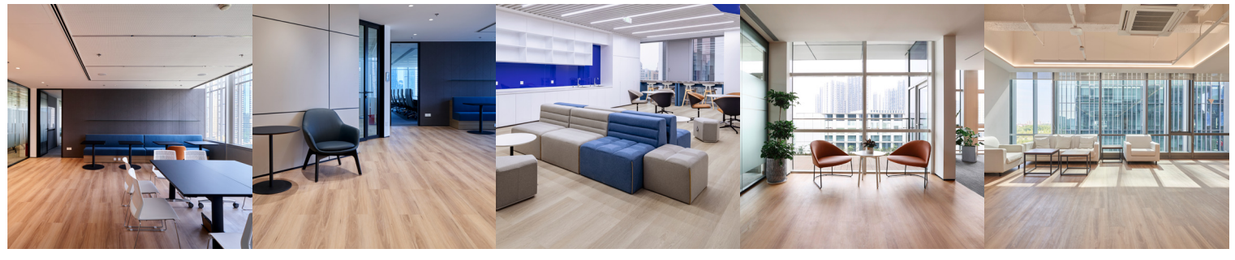

VOXFLOR®
www.voxflor.com

Shanghai **Headquarters**
**T +86 21 62989325**

**Milano** Creative Studio
**T +39 3885863150**

China **Branch Offices**
Beijing/ Guangzhou/ Shenzhen/ Xiamen