



LEXICON*



CUT PILE PATTERNED

Please note: There may be slight color difference between the picture and actual carpet. Slight color variation may occur from dye lot to dye lot.



07 RYE TOAST

LEXICON Specifications

| | |
|---------------------|--|
| Construction | 1/12" Multi-Level Cut & Loop Pattern |
| Yarn Composition | 100% Natiq™ 30 Nylon |
| Tufted Pile Weight | Ca. 1085 g/m ² (32 oz/yd ²) |
| Total Weight | Ca. 2100 g/m ² (62 oz/yd ²) |
| Pile Height | Ca. 5 mm (Cut), 2 mm (Loop) |
| Total Height | Ca. 8 mm (Cut), 5 mm (Loop) |
| Stitch Rate | 33.9 per 10 cm |
| Density | 15.0 Kilotex/cm ² (7200 FHA) |
| Backing | Dual Bonded Woven Synthetic |
| Standard Roll Size | 3.66m (+/-2%) x 50m (+/-2%) |
| Pattern Repeat Size | 15 cm x 75 cm half drop (6" x 29") |

Performance

| | |
|---------------------------|--|
| Stain Resistance | 8 (AATCC 175-1993) |
| Static Control | Pass - Max. 3 kV (AATC-134) |
| Soil Protection | PermaSeal™ Protected |
| Anti-Microbial Protection | Anti-Microbial Agent In Backing Laminate |
| Flammability | |
| - Radiant Panel | Pass - Class I (ASTM E-648) |
| - Pill Test | Pass - 8 (ASTM-D-2859) |
| Colourfastness | |
| - to light | L5 |
| - to wet cleaning | Grey Scale 5 |


Warranties

10 Year Limited Carpet Wear Warranty
 Lifetime Limited Stain Proof - No Exceptions Warranty
 Limited AccuPattern™ Warranty
 Lifetime Limited Antishock Carpet Warranty

Ideal for Heavy Commercial Use.

The subfloor should be dry, smooth, flat, dust-free and resistant to compression and load-bearing. Where seaming is necessary, a seam sealant must be used for all such installations. Due to dye lot variations, actual color may vary slightly from the samples. Chair pads are recommended to prevent premature wear of carpet.

MANUFACTURED IN CANADA

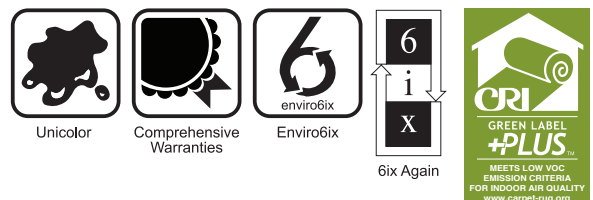

LEXICON