

Touch

Color



Soltis Touch

The perfect match naturally

Give your interiors a touch of natural elegance. Soltis Touch combines aesthetic qualities with high levels of thermal, acoustic and light protection performance.

Optimum comfort

■ Thermal performance:

This fabric excludes up to 91% of incoming heat to maintain a stable interior temperature in summer without increasing air conditioning requirements. This enhances user comfort and building energy performance.

■ Visual comfort:

It maintains outward views and uninterrupted natural light while protecting from glare.

■ Acoustic performance:

It reduces reverberation, thereby improving the occupants' acoustic comfort. The fabric absorbs up to 45% of the noise within a 100 mm air gap.

■ Fire safety:

It meets international standards for fire rating standards and does not contribute to flashover.

■ Health safety:

It is guaranteed totally phthalate-free. It is certified Greenguard Gold, proving the fabric complies with the most stringent indoor air quality standards. It therefore contributes to creating a healthier interior.

5% - 3% - 1%

Soltis Touch is available in 3 openness factors to adapt to every need and configuration.

■ 5%:

Transparency maintained to take full advantage of the exterior view and natural light.

■ 3%:

The ideal combination of aesthetics, thermal, visual and acoustic comfort.

■ 1%:


The ideal solution for controlling glare and enhancing acoustic comfort.



**Filter the light
with perfect clarity**


Soltis Touch

Color

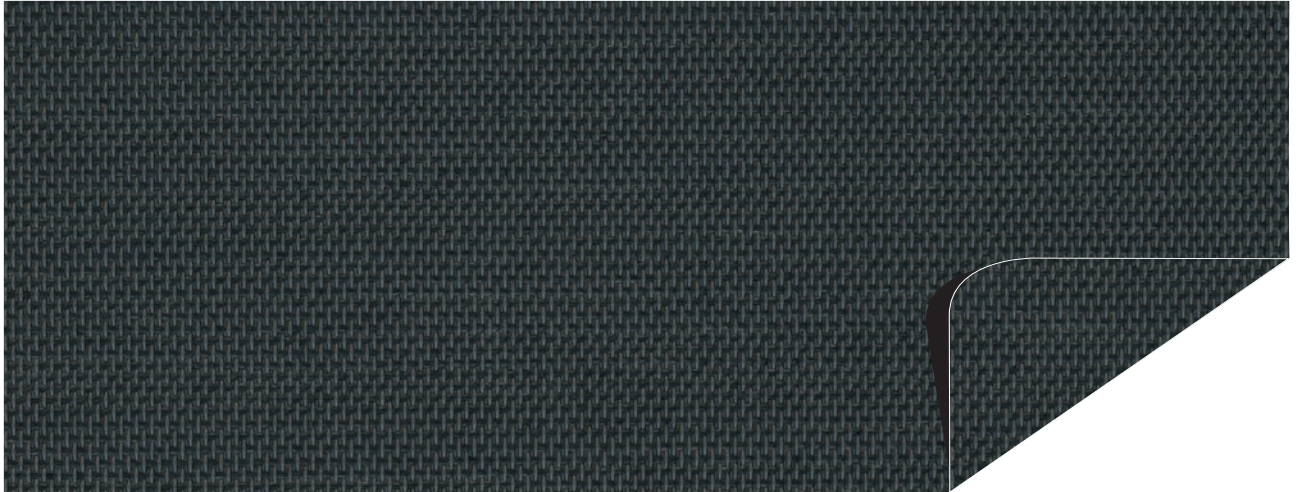


Charcoal


7653-50940




Jasmine 7653-50982




Carrara 7653-50937




Mother of Pearl 7653-50953




Flint 7653-50946




Agate grey 7653-50945




Glacier 7653-50955




Raffia 7653-50959




Wheat 7653-50941




Citrine 7653-50962




Turmeric 7653-50942




Biscuit 7653-50960




Maple 7653-50952




Reed 7653-50964




Flower bud 7653-50954




Rope 7653-50957




Celestial 7653-50938




Elephant 7653-50943




Opaline 7653-50947




Shore 7653-50949




Pacific 7653-50961




Twilight 7653-50950




Coffee bean 7653-50939




Tannin 7653-50948




Mocha 7653-50958




Mahogany 7653-50951



Tornado 7653-50963



Cobalt 7653-50944






Charcoal 7653-50940


Main applications

Color

Interior solar protection

	Roller blind	✓
	Vertical blind	✓ (BV7653)
	Panel tracks	✓

Smart Yarn Technology



Smart Yarn technology involves coating high-tenacity polyester yarns with polymer, then weaving and stabilising them to produce products with excellent mechanical strength and UV resistance.

Designed to last and withstand bad weather, these technical fabrics also bring a unique, modern design to your interiors (Soltis Touch) and terrace fittings (Soltis Veozip), thanks to the many possible combinations of colours, materials and textures they offer.

Thermal and light transmission properties

(according to EN 14501)

	Color	Soltis Touch 5% 7655						Soltis Touch 3% 7653 & BV7653						Soltis Touch 1% 7651									
		Width		TS	RS	AS	TV n-h	g _{tot} ¹ *	Width			TS	RS	AS	TV n-h	g _{tot} ¹ *	Width		TS	RS	AS	TV n-h	g _{tot} ¹ *
		180 cm 70.9 in	270 cm 106.3 in						127 mm 5.0 in	180 cm 70.9 in	270 cm 106.3 in						180 cm 70.9 in	270 cm 106.3 in					
50937		•	•	11	54	35	9	0.15	•	•	•	8	55	37	7	0.15	•	•	6	57	37	4	0.15
50938		•	•	7	28	65	7	0.23	•	•	•	4	28	68	4	0.23							
50939		•	•	7	14	79	7	0.27	•	•	•	4	14	82	4	0.27							
50940		•	•	6	9	85	6	0.28	•	•	•	4	9	87	4	0.28	•	•	2	8	90	2	0.26
50941		•	•	10	48	42	8	0.18	•	•	•	7	48	45	4	0.18							
50942		•	•	9	31	60	8	0.23	•	•	•	5	31	64	4	0.23							
50943		•	•	7	23	70	7	0.24	•	•	•	3	23	74	3	0.24							
50944		•	•	6	11	83	6	0.28	•	•	•	4	11	85	4	0.28							
50945		•	•	9	45	46	8	0.18	•	•	•	6	46	48	5	0.18	•	•	4	47	49	3	0.18
50946		•	•	9	46	45	8	0.18	•	•	•	7	45	48	6	0.18							
50947			•	9	32	59	8	0.23		•	•	6	33	61	5	0.22							
50948		•	•	7	15	78	7	0.27	•	•	•	5	15	80	5	0.27	•	•	2	16	82	2	0.27
50949			•	8	31	61	7	0.23	•	•	•	5	32	63	4	0.23							
50950											•	4	11	85	4	0.28							
50951			•	8	11	81	7	0.28	•	•	•	4	11	85	3	0.28							
50952									•	•	•	5	25	70	4	0.24							
50953											•	7	52	41	6	0.16							
50954											•	7	44	49	6	0.18							
50955			•	9	47	44	8	0.18			•	6	47	47	5	0.18							
50957		•	•	9	34	57	8	0.21	•	•	•	6	35	59	5	0.21							
50958		•	•	7	15	78	7	0.28	•	•	•	4	12	84	4	0.28							
50959		•	•	9	39	52	8	0.20	•	•	•	6	40	54	6	0.20	•	•	4	42	54	3	0.19
50960		•	•	8	26	66	7	0.24	•	•	•	5	26	69	4	0.24							
50961											•	5	26	69	4	0.24							
50962											•	5	32	63	4	0.23							
50963			•	6	10	84	6	0.28	•	•	•	4	11	85	4	0.28							
50964											•	5	30	65	5	0.23							
50982		•	•	17	74	9	15	0.10	•	•	•	14	75	11	12	0.10	•	•	11	76	13	9	0.09


TS Solar Transmission in %
RS Solar Reflection in %
AS Solar Absorption in %
TS + RS + AS = 100% of the incident energy
TV n-h Normal Visible light transmission - hemispherical in %
g_{tot}¹ Indoor Solar Factor

* Detailed method ISO 52022-3 Takes into account the spectral values of glazing transmission and reflection + blind complex for calculating the solar factor g_{tot}¹.
 Type "D" glazing: insulating double glazing with low emissivity on surface 2 (4 + 16 + 4; Argon filling) g = 0.32 - U = 1.1.

Carry on the experience with our fabric configurator!



Scan this QR code

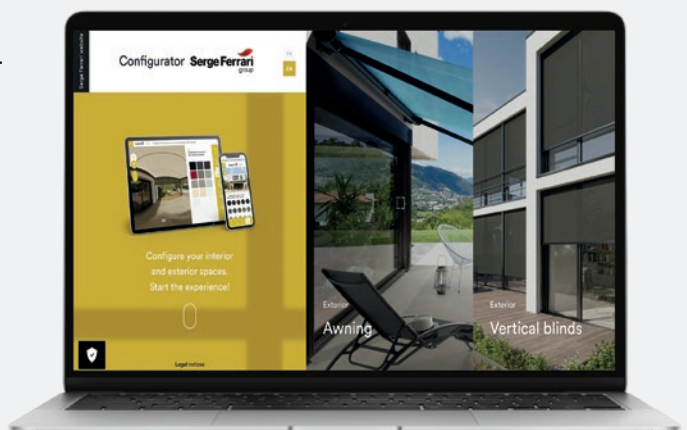

Soltis Touch

	Color 5%	Color 3%	Color 1%
Référence	7655	7653 & BV7653	7651

Technical properties

Openness factor	5%	3%	1%
Weight EN ISO 2286-2	430 g/m ² • 12.7 oz/sq. yd	455 g/m ² • 13.9 oz/sq. yd	450 g/m ² • 13.3 oz/sq. yd
Thickness	0.73 mm • 730 microns	0.75 mm • 750 microns	0.65 mm • 650 microns
Width	180 cm - 270 cm 70.9 in - 106.3 in	127 mm - 180 cm - 270 cm 5 in - 70.9 in - 106.3 in	180 cm - 270 cm 70.9 in - 106.3 in

Roll length

In 127 mm • 5 in Width	-	45 lm • 49.21 yd	-
In 180 cm • 70.9 in Width	45 lm • 49.21 yd	45 lm • 49.21 yd	45 lm • 49.21 yd
In 270 cm • 106.3 in Width	30 lm • 32.81 yd	30 lm • 32.81 yd	30 lm • 32.81 yd

Physical properties

Tensile strength (warp/weft) EN ISO 1421	150/100 daN/5 cm 337/225 lbs/2 in	150/120 daN/5 cm 337/270 lbs/2 in	150/100 daN/5 cm 337/225 lbs/2 in
Tear strength (warp/weft) DIN 53.363	15/15 daN 34/34 lbs	15/15 daN 34/34 lbs	15/15 daN 34/34 lbs
Acoustic absorption EN ISO 354	-	$\alpha_w=0,40$ (LA=100 mm)	$\alpha_w=0,45$ (LA=100 mm)

Fire resistance

Rating	M1/NF P 92-507 B1/DIN 4102-1 M1/UNE 23.727-90 Class 1/EN 13773 Classe 1/UNI 9177-87 VKF 5.3/SN 198898 BS 7837 BS 5867-2 Schwerbrennbar-Q1-Tr1/ONORM A 3800-1 Method 1&2/NFPA 701 CSFMT19 Class A/ASTM E84 CAN ULC S109 AS/NZS 1530.2 & 3	M1/NF P 92-507 B1/DIN 4102-1 M1/UNE 23.727-90 Class 1/EN 13773 Classe 1/UNI 9177-87 VKF 5.3/SN 198898 BS 7837 BS 5867-2 Schwerbrennbar-Q1-Tr1/ONORM A 3800-1 Method 1&2/NFPA 701 CSFMT19 Class A/ASTM E84 CAN ULC S109 AS/NZS 1530.2 & 3	M1/NF P 92-507 B1/DIN 4102-1 M1/UNE 23.727-90 Class 1/EN 13773 Classe 1/UNI 9177-87 VKF 5.3/SN 198898 BS 7837 BS 5867-2 Schwerbrennbar-Q1-Tr1/ONORM A 3800-1 Method 1&2/NFPA 701 CSFMT19 Class A/ASTM E84 CAN ULC S109 AS/NZS 1530.2 & 3
Euroclass EN 13501-1	B-s2,d0	B-s2,d0	B-s2,d0

Management system

Quality: ISO 9001 • Environment: ISO 14001 • Energy: ISO 50001

Certifications, labels, warranty

Smart Yarn Technology							
5-year warranty							

Tools and Services

Soltissim: tool to evaluate energy savings that can be achieved with Soltis solar protection. Contact your Serge Ferrari representative.

¹ Summarizes the group's CSR project focused on human, to align economic performance and positive impact.

* 1% and 5% are also available on request in small rolls in the BV variant.

The technical data above are averaged values with a +/-10% tolerance.

The purchaser of our products is responsible for their application or transformation in relation to possible third party rights. The purchaser of our products is responsible for their installation in compliance with the standards, working practices and safety regulations of their destination country. Please refer to our warranty document with regard to contractual liability.

Values quoted in this document are commonly used test results for design purposes. They are given for information only in order to offer our customers optimum usage of our products. Our products are subject to improvements resulting from technical developments and we reserve the right to modify their characteristics at any time. The purchaser of our products is responsible for checking the above data.

The colours and textures presented are included for information only.